

How to Adjust Your Ride-on-Air Motorcycle Seat Cushion:

For the Ride-on-Air Cushion to be effective, it must be properly adjusted. The goal is to allow you to sink as deeply as possible into the Cushion without hitting the bottom. This is achieved by having as little air in the Cushion as possible. Proper adjustment can only be done while you are sitting on the Cushion.

Step 1: Install the Ride-on-Air Cushion on your motorcycle.


To download Installation Guide – [Click here](#)

Step 2: Connect the precise leveling pump to the cushion. Turn the valve clockwise to close and start pumping until the Cushion is filled with air. DO NOT OVERINFLATE!

Step 3: Sit on the Cushion in your normal riding position.

Step 4: Adjust the air by opening the valve anticlockwise and releasing air until you sink down into the Cushion. Close the valve when you are about 1/2 inch off the seat. If you bottom out on the base of the seat, add more air and adjust again. DO NOT OVERINFLATE. This product works most effectively with minimal amount of air.

Step 5: Disconnect the precise leveling pump from the Cushion.

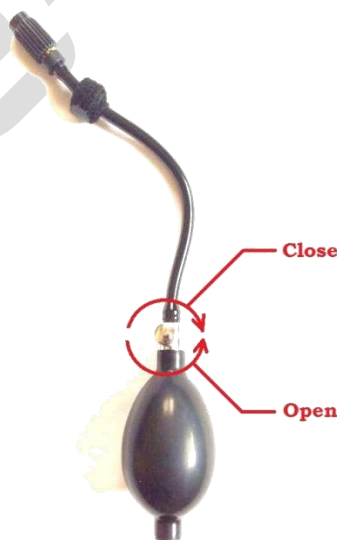

Precise Leveling Pump